




## 贴片保险丝(快断型) SMD Fuse (Fast-Acting) 32V

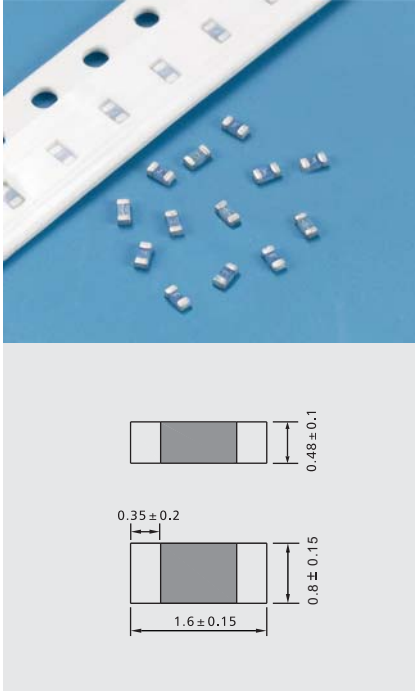

**测试标准:**  
Testing Standard:  
UL248-1 UL248-14

**额定分断能力:**  
**Interrupting Rating:**  
50 Amperes at 32V DC(250mA~1A)  
35 Amperes at 32V DC(1.25A~5A)


**工作温度:**  
**Operating Temperature:**  
-55°C ~+125°C

**材料:**  
**Materials:**  
Substrate:ceramic/glass cover  
Termination:sliver over-plated with nickel and tin  
Element:silver

**焊接方法:**  
**Soldering Method:**  
Reflow soldering: 260°C, 10s max

**包装:**  
**Packaging:**  
Automaton taped 5000PCS per roll,  
150000PCS per carton

**Time-Current Characteristics**  
电流-时间曲线图

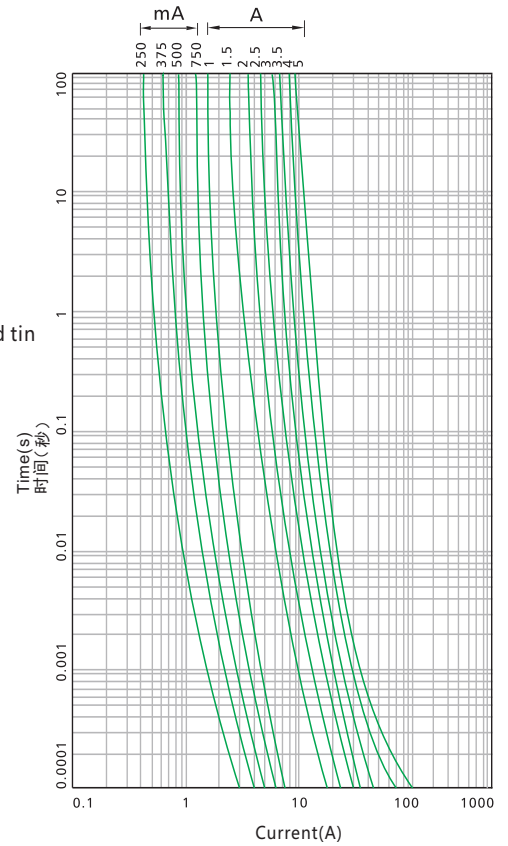

### 电气特性: Electrical Characteristics

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max(小于60秒)

目录编号: Catalog No.D:32V.

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	标示 Marking	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)	认证 Approvals
					● 表示已获认证 ● 表示认证中
06D0250D	250mA	32V	D	0.00040	●
06D0375D	375mA	32V	E	0.00087	●
06D0500D	500mA	32V	F	0.00188	●
06D0750D	750mA	32V	G	0.0088	●
06D1100D	1A	32V	H	0.0025	●
06D1125D	1.25A	32V	J	0.0125	●
06D1150D	1.5A	32V	K	0.0310	●
06D1200D	2A	32V	N	0.0480	●
06D1250D	2.5A	32V	O	0.0615	●
06D1300D	3A	32V	P	0.0690	●
06D1350D	3.5A	32V	R	0.1181	●
06D1400D	4A	32V	S	0.2380	●
06D1500D	5A	32V	T	0.6817	●