


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		

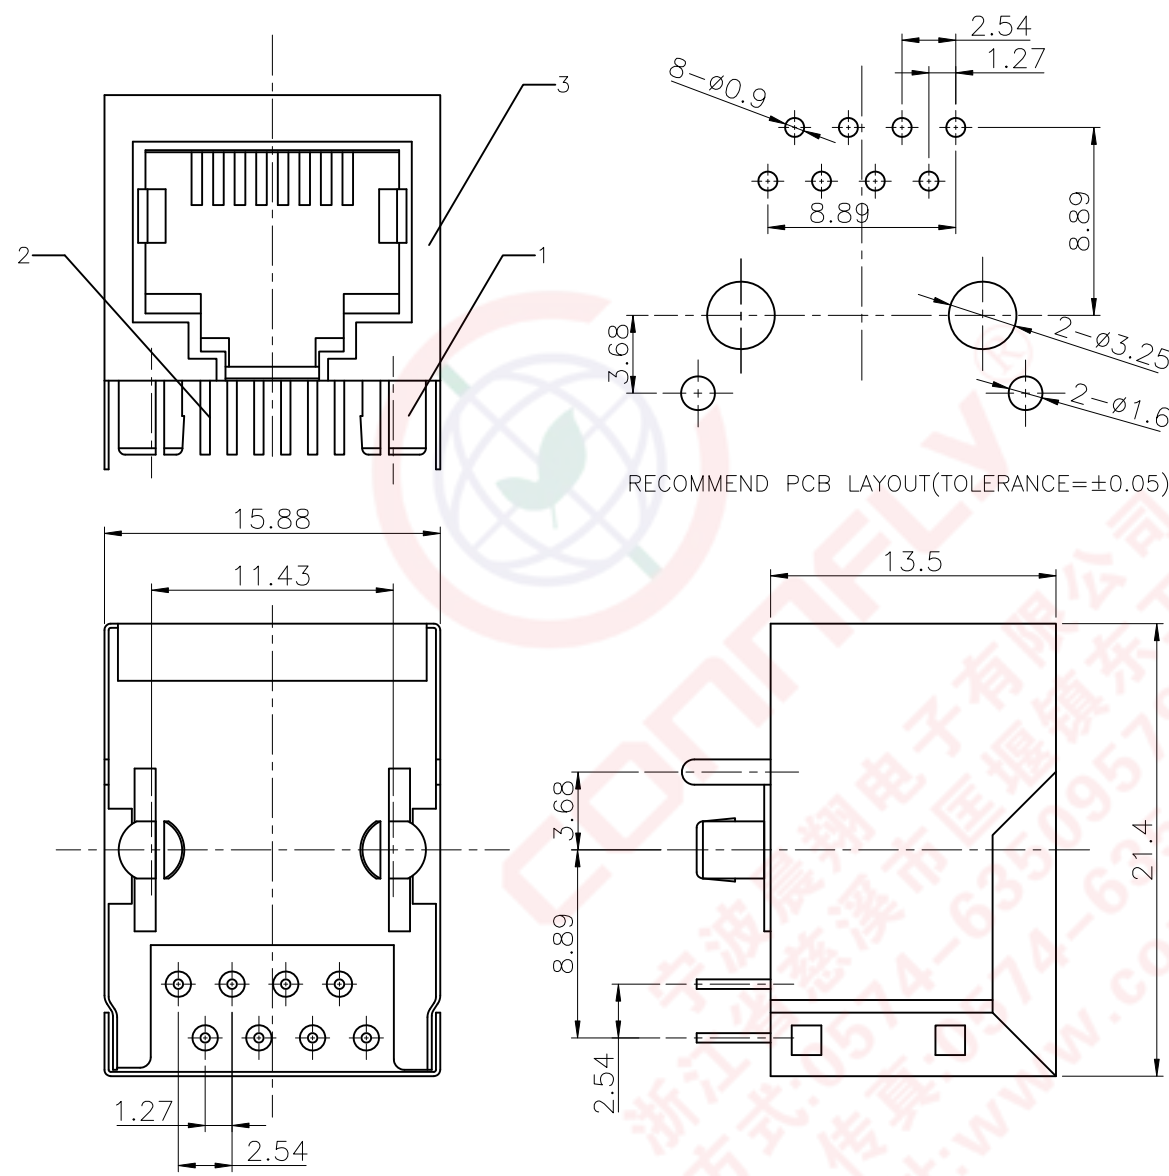

SPECIFICATION

- Insulation Resistance:1000M $\Omega$  Min.
- Withstand Voltage:500V,AC/Minute.
- Durability:600 Cycles Min.
- Product Number Code:

DS1128-X X X X X


- Housing Materials P:PBT
- Housing Color B:Black
- Contact Plating O:Gold Flash
- No.Of Contacts 8:8p8c
- Connector Type S:Socket

(3)	SHIELDING	1	COPPER ALLOY	0.20mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	Q'ty	MATERIAL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	$\pm 0.60$	X.	$\pm 5^\circ$
.X	$\pm 0.38$	.X	$\pm 3^\circ$
.XX	$\pm 0.25$	.XX	$\pm 2^\circ$

DRAWING TYPE	CUSTOMER
SCALE	1:1
SHEET	1 OF 1
DRAWING NO.	C-DS1128-XXXX

PROJECTION	TITLE
UNITS	PCB JACK 8P 1PORT
SHEET SIZE	SERIES DS1128 SERIES

 **晨翔电子有限公司**  
**CONNFLY CONNPLY ELECTRONIC CO. LTD**