
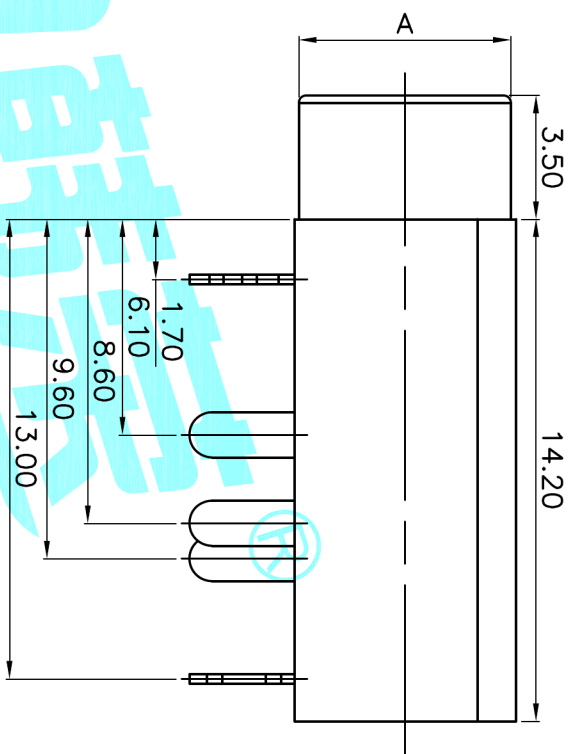


P.C.B LAYOUT(copper-sided view)  
13.00

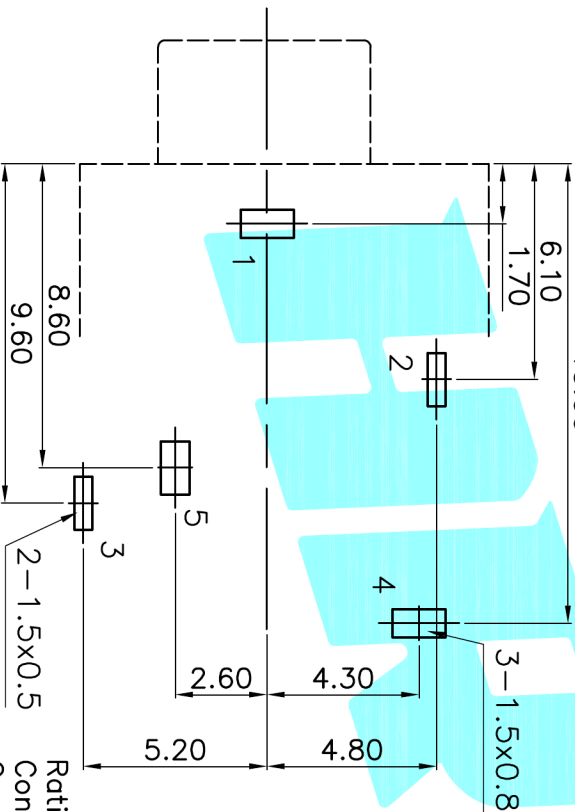

Rating:0.5A 30V DC  
 Contact Resistance:100 mΩ Max.  
 Operating temperature:-20℃~70℃  
 Operating force:3-20N  
 Operating Life:5,000cycles

Model No.	A=φ6	PJ-3240-A	PJ-3240-B	PJ-3240-C
	A=M6xP0.5	PJ-3240M-A	PJ-3240M-B	PJ-3240M-C
Schematic				

Model No.	A=φ6	PJ-3240-D	PJ-3240-E
	A=M6xP0.5	PJ-3240M-D	PJ-3240M-E
Schematic			

② Terminal	5	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TER.NO.	QTY.
APPROVALS		DATE	
DRAWN	J.X.Zhang	2013/11/11	
CHECKED		TITLE:	PHONE JACKES
APPROVALS		PART NO.	PJ-3240

**HYRO**  
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
			30 <sup>±0.15</sup>	±0.30	ANGLE	UNIT: mm
			10 <sup>±0.20</sup>	±0.20	SCALE: 1:1	PROJ.
			5 <sup>±0.10</sup>	±0.15	DRAWING NO.	SHEET 1 OF 1