


## High Current, Power Inductors

### FXL0630-XXX-M Power Choke

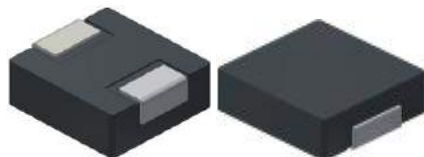

#### Description

- Halogen Free
- 125°C maximum total temperature operation
- 7.3x6.8x 3.0mm maximum surface mount package
- Powder iron core material
- Magnetically shielded, low EMI
- High current carrying capacity, Low core losses
- Inductance range from 0.22μH to 33μH
- Current range from 2.5 to 34 Amps
- Frequency range up to 5MHz
- RoHS compliant

#### Applications

- Voltage Regulator Module (VRM)
- Multi-phase regulators
- Point-of-load modules
- Smart phone POL modules
- SSD modules
- Notebook regulators
- Battery power systems
- Graphics cards
- Data networking and storage systems

#### Environmental Data

- Storage temperature range: -55°C to +125 °C
- Operating temperature range: -55°C to +125°C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant



| Description        |   |   |            |                  |   |   |            |                      |   |            |  |   |
|--------------------|---|---|------------|------------------|---|---|------------|----------------------|---|------------|--|---|
| FXL0630-1R5-M      |   |   |            | 1.5μH            |   |   |            | ±20 %                |   |            |  |   |
| Model              |   |   |            | Inductance Value |   |   |            | Inductance Tolerance |   |            |  |   |
| Global Part Number |   |   |            |                  |   |   |            |                      |   |            |  |   |
| F                  | X | L |            | 0                | 6 | 3 | 0          | 1                    | R | 5          |  | M |
| Product Series     |   |   | Dimensions |                  |   |   | Inductance |                      |   | Value Tol. |  |   |

| Part No.      | Inductance         | DC Resistance |       | Heating Rating Current | Saturation Current |
|---------------|--------------------|---------------|-------|------------------------|--------------------|
|               | L0 (μH)            | DCR (mΩ)      |       | Idc (A)                | Isat (A)           |
|               | ±20 %, 100 kHz, 1V | TYP.          | MAX.  | TYP.                   | TYP.               |
| FXL0630-R22-M | 0.22               | 2.5           | 3.0   | 24.0                   | 34.0               |
| FXL0630-R24-M | 0.24               | 2.6           | 3.1   | 23.0                   | 26.0               |
| FXL0630-R33-M | 0.33               | 3.0           | 3.5   | 21.0                   | 25.0               |
| FXL0630-R47-M | 0.47               | 3.5           | 4.1   | 18.0                   | 20.0               |
| FXL0630-R56-M | 0.56               | 3.9           | 4.5   | 16.5                   | 18.0               |
| FXL0630-R68-M | 0.68               | 4.8           | 5.3   | 16.0                   | 17.0               |
| FXL0630-R82-M | 0.82               | 5.4           | 6.0   | 14.0                   | 16.0               |
| FXL0630-1R0-M | 1.0                | 6.7           | 7.4   | 12.0                   | 15.0               |
| FXL0630-1R5-M | 1.5                | 10.6          | 12.1  | 12.0                   | 14.0               |
| FXL0630-2R2-M | 2.2                | 13.5          | 15.0  | 9.5                    | 10.0               |
| FXL0630-3R3-M | 3.3                | 18.0          | 22.0  | 8.5                    | 9.5                |
| FXL0630-4R7-M | 4.7                | 28.0          | 33.0  | 6.0                    | 6.5                |
| FXL0630-6R8-M | 6.8                | 42.5          | 48.0  | 5.0                    | 6.0                |
| FXL0630-8R2-M | 8.2                | 54.0          | 60.0  | 5.0                    | 6.0                |
| FXL0630-100-M | 10.0               | 62.0          | 67.0  | 4.5                    | 5.5                |
| FXL0630-150-M | 15.0               | 104.0         | 115.0 | 3.0                    | 4.5                |
| FXL0630-220-M | 22.0               | 180.0         | 200.0 | 2.3                    | 3.0                |
| FXL0630-330-M | 33.0               | 280.0         | 310.0 | 2.0                    | 2.5                |

#### Notes

1. All test data is referenced to 25 °C ambient
2. Operating temperature range - 55 °C to + 125 °C
3. Idc(A):DC current (A) that will cause an approximate ΔT of 40 °C(reference ambient temperature is 25 °C)
4. Isat(A):DC current (A) that will cause L0 to drop approximately 30 %
5. The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.

•Dimensions-mm

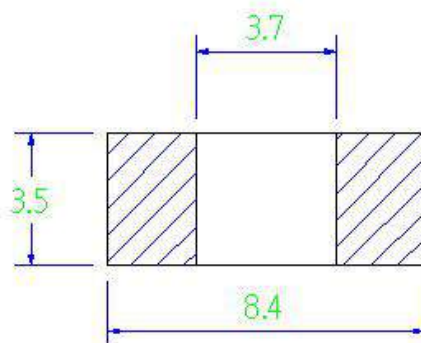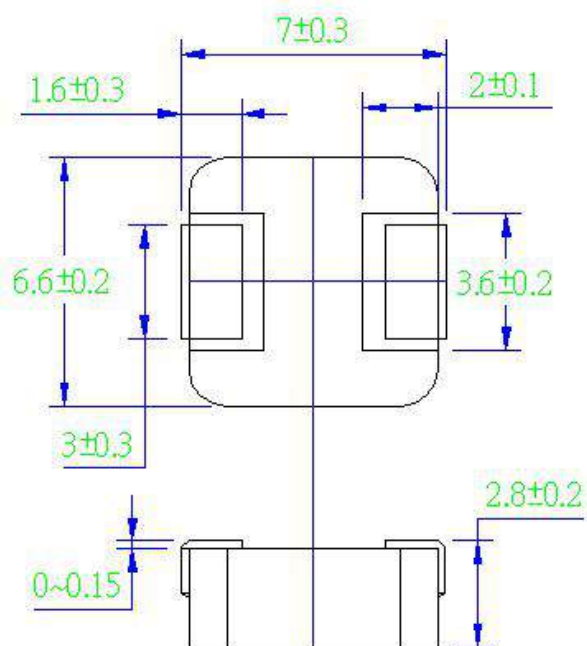


Recommend Land Pattern Dimensions


•Marking


The inductor is marked with a 3-digit code


Example -  $-1.5 \rightarrow 1R5$

Note : Using Ink for marking



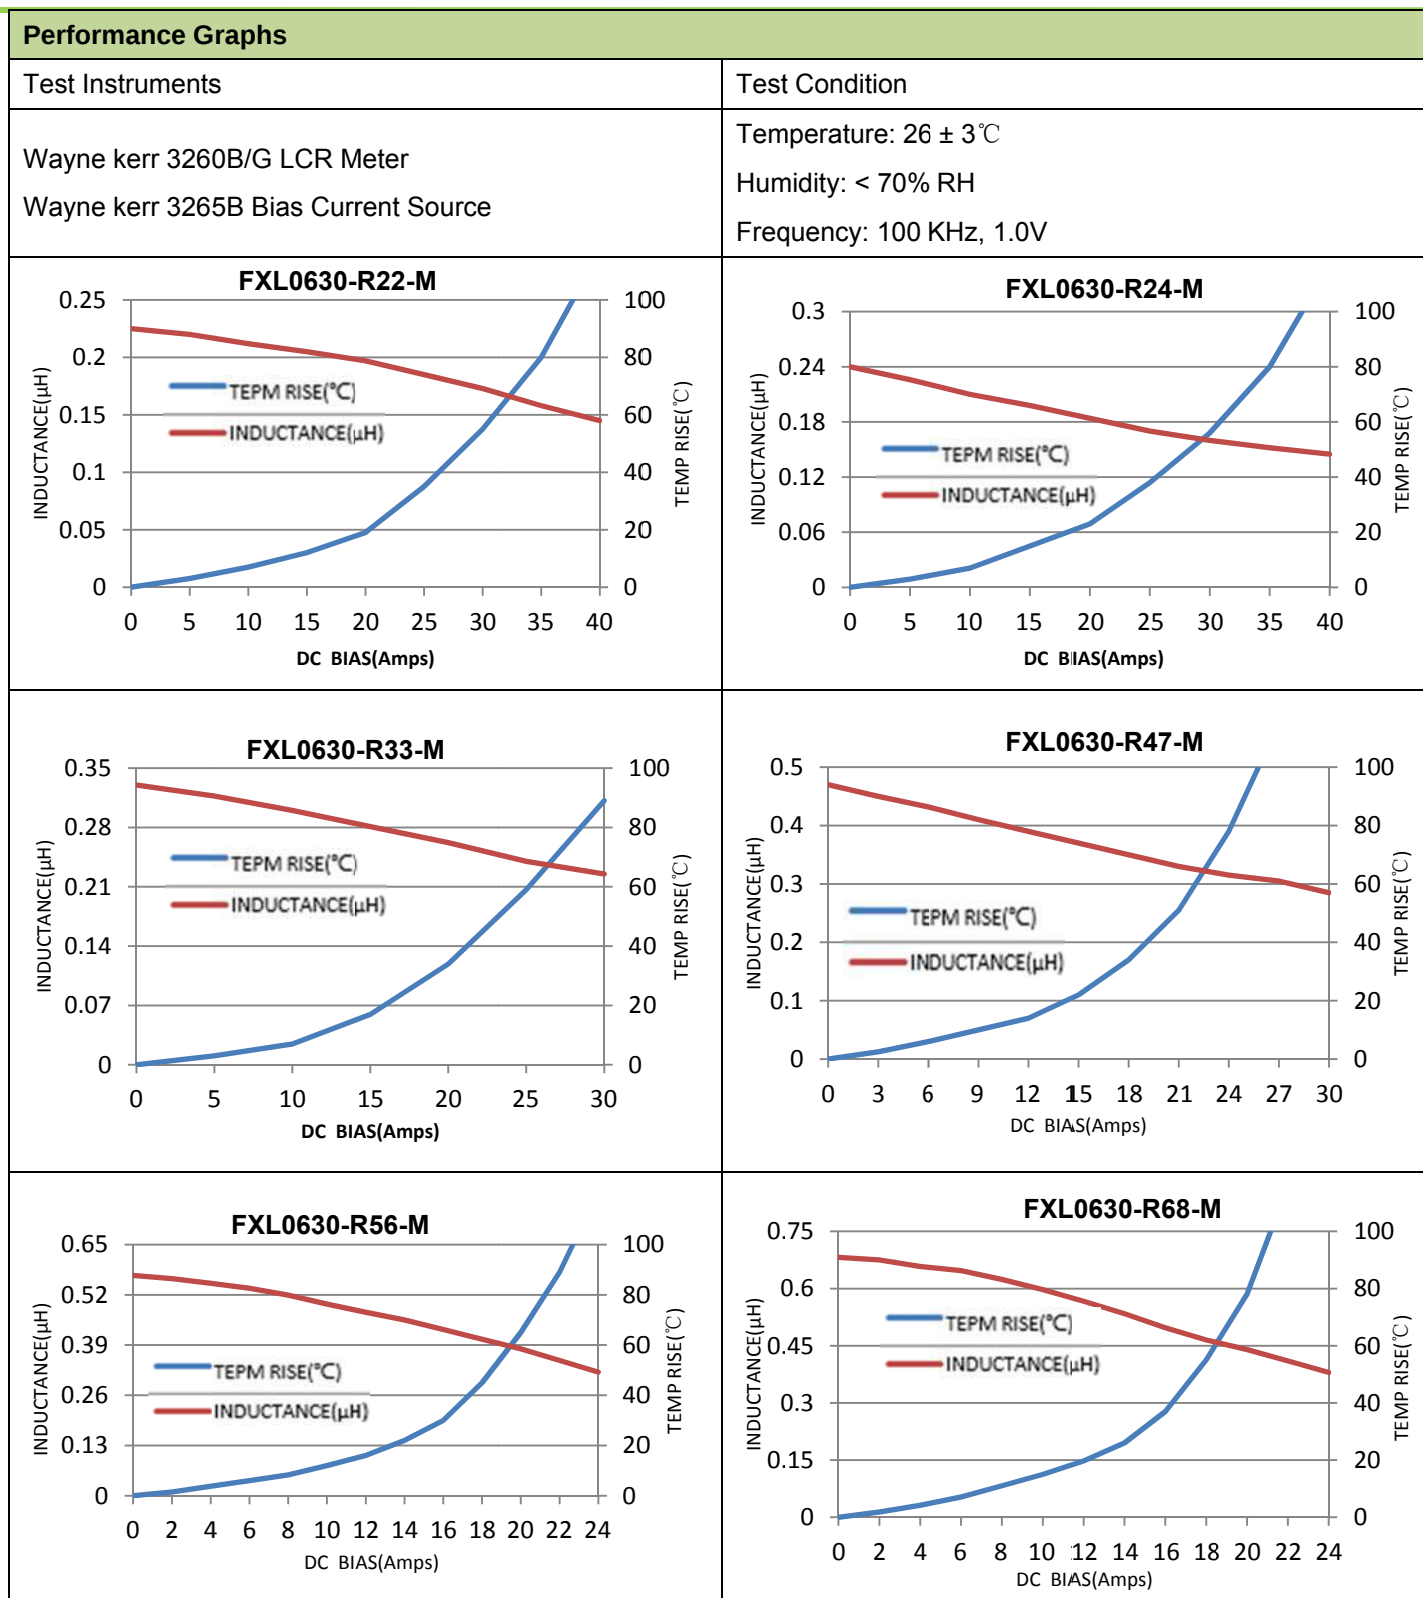


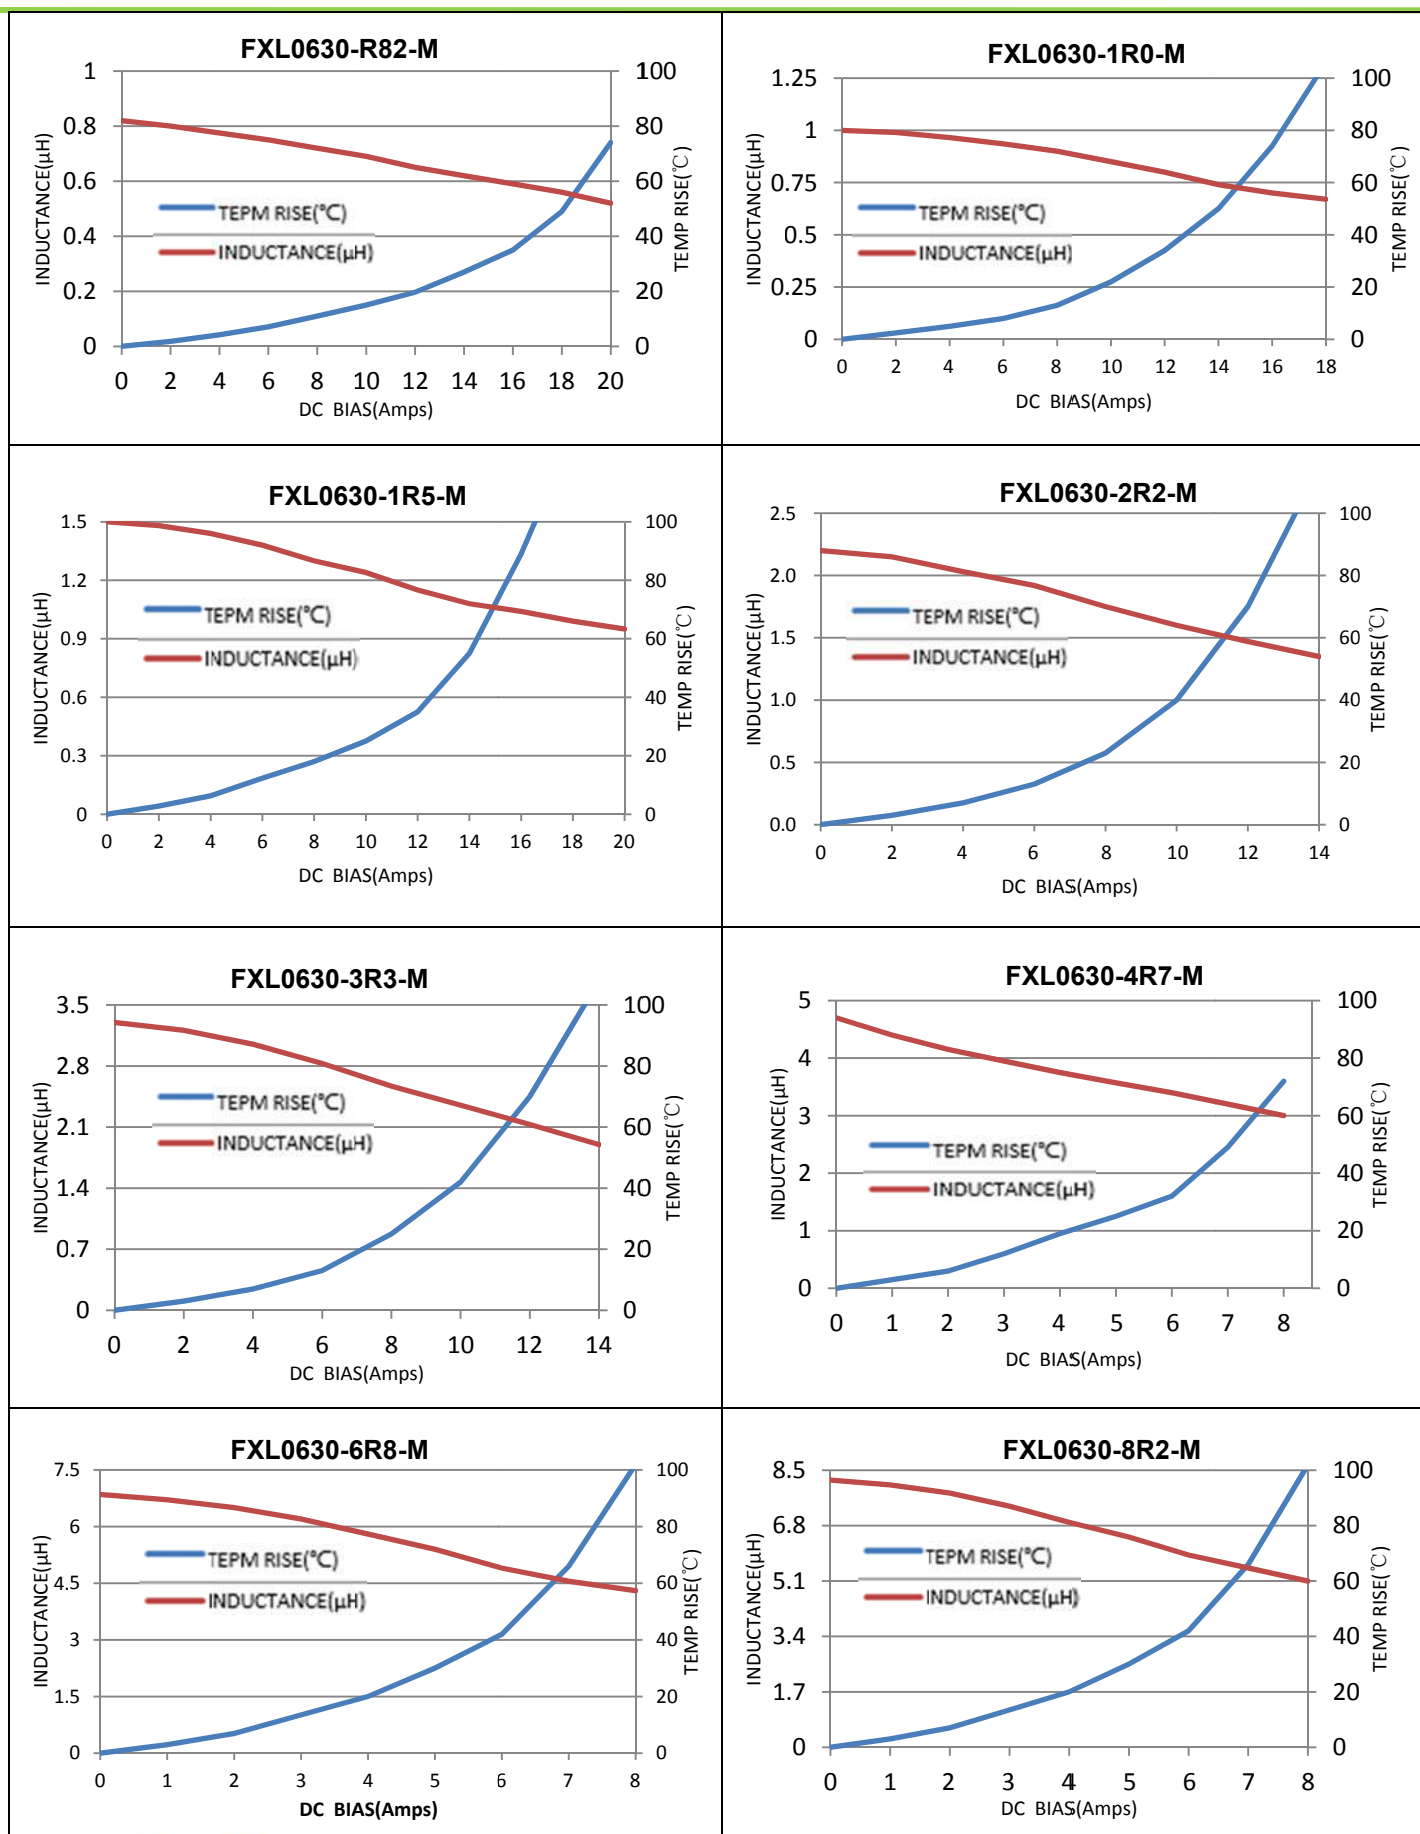

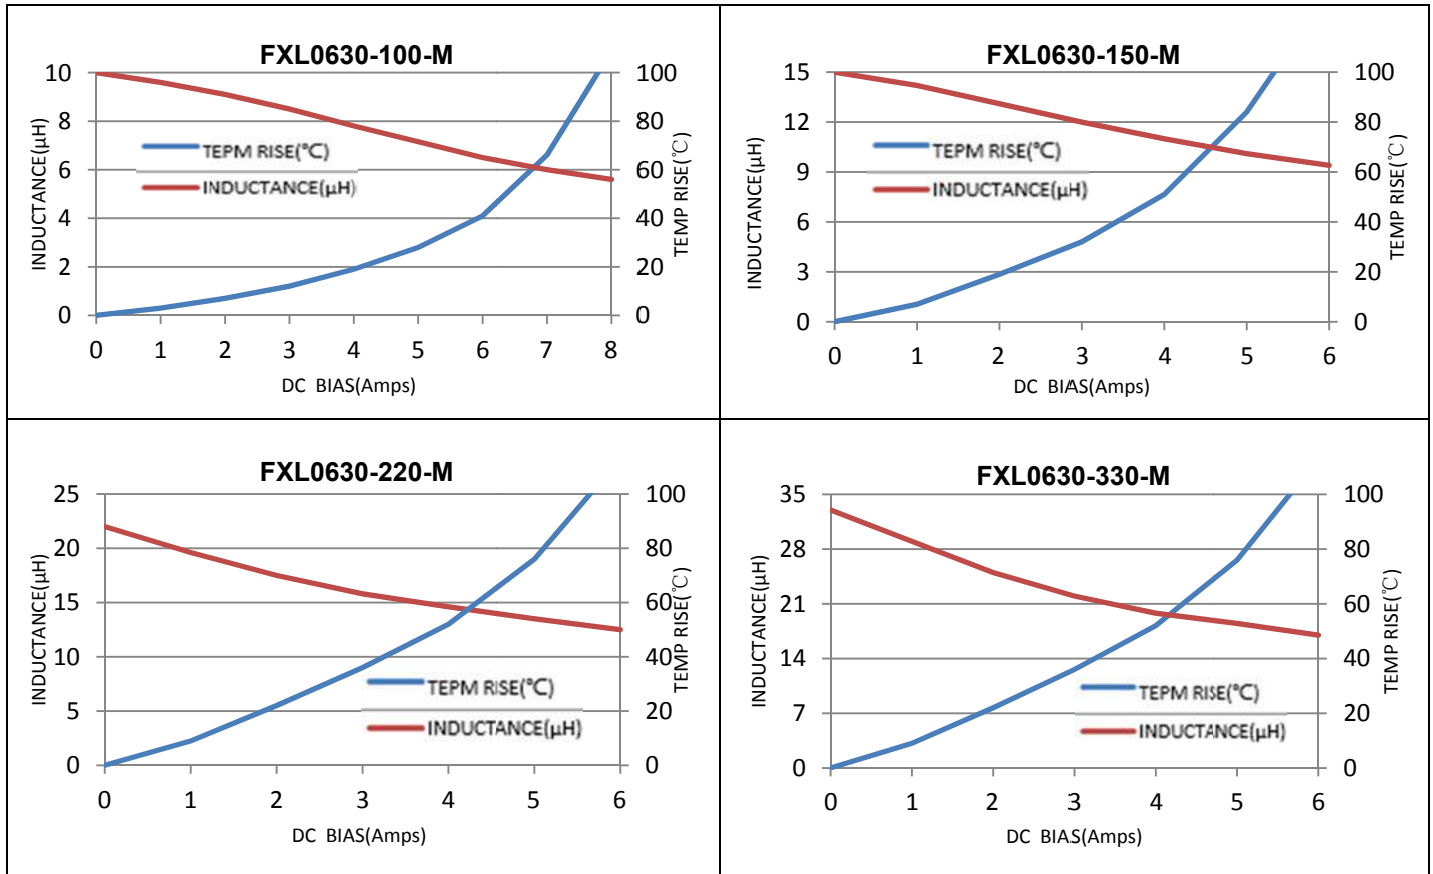


| Mechanical Reliability      |                                                                                               |                                                                                                                                                                                                                                                                                         |
|-----------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Item                        | Specification and Requirement                                                                 | Test Method                                                                                                                                                                                                                                                                             |
| Solderability               | The surface of terminal immersed shall be minimum of 95% covered with a new coating of solder | Solder heat proof:<br>1. Preheating: $160 \pm 10^{\circ}\text{C}$<br>2. Retention time: $245 \pm 5^{\circ}\text{C}$ for $2 \pm 0.5$ seconds                                                                                                                                             |
| Vibration                   | Without mechanical damage such as break                                                       | 1. Vibration frequency:<br>(10 Hz to 55 Hz to 10Hz) in 60 seconds as a period<br>2. Vibration time:<br>Period cycled for 2 hours in each of 3 mutual perpendicular directions.<br>3. Amplitude: 1.5 mm max.                                                                             |
| Shock                       | Inductance change: Within $\pm 10\%$ Without mechanical damage such as break                  | 1. Peak value: 100 G<br>2. Duration of pulse: 11ms<br>3. 3 times in each positive and negative direction of 3 mutual perpendicular directions                                                                                                                                           |
| Endurance Reliability       |                                                                                               |                                                                                                                                                                                                                                                                                         |
| Item                        | Specification and Requirement                                                                 | Test Method                                                                                                                                                                                                                                                                             |
| Thermal Shock               | Inductance change: Within $\pm 10\%$<br>Without distinct damage in appearance                 | 1. Repeat 100 cycles as follow:<br>( $-55 \pm 2^{\circ}\text{C}$ ; $30 \pm 3$ min)<br>→ (Room temp., 5 min)<br>→ ( $+125 \pm 2^{\circ}\text{C}$ , $30 \pm 3$ min)<br>→ (Room temp., 5 min)<br>2. Recovery: $48 + 4 / -0$ hours of recovery under the standard condition after the test. |
| High Temperature Resistance | Inductance change: Within $\pm 10\%$<br>Without distinct damage in appearance                 | 1. Environment condition: $85 \pm 2^{\circ}\text{C}$<br>Applied Current: Rated current<br>2. Duration: $1000 + 4 / -0$ hours                                                                                                                                                            |
| Humidity Resistance         | Inductance change: Within $\pm 10\%$<br>Without distinct damage in appearance                 | 1. Environment condition: $60 \pm 2^{\circ}\text{C}$<br>Humidity: 90–95%<br>Applied Current: Rated current<br>2. Duration: $1000 + 4 / -0$ hours                                                                                                                                        |
| Low Temperature Store       | Inductance change: Within $\pm 10\%$<br>Without distinct damage in appearance                 | Store temperature:<br>$-55 \pm 2^{\circ}\text{C}$ , $1000 + 4 / -0$ hours                                                                                                                                                                                                               |
| High Temperature Store      | Inductance change: Within $\pm 10\%$<br>Without distinct damage in appearance                 | Store temperature:<br>$+125 \pm 2^{\circ}\text{C}$ , $1000 + 4 / -0$ hours                                                                                                                                                                                                              |

### Tape Packaging Dimensions

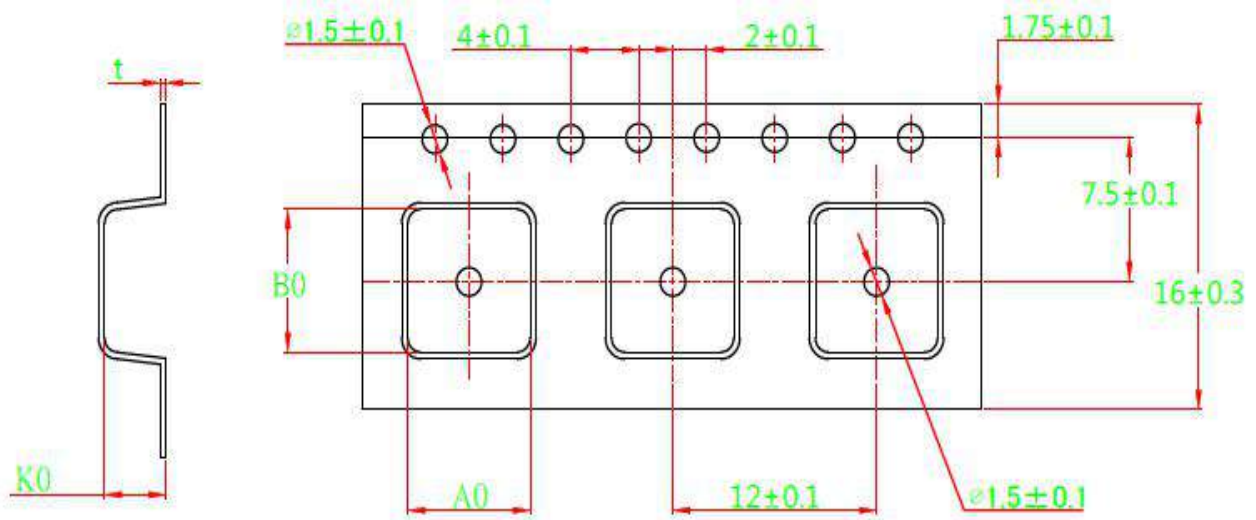

| A0             | B0             | K0             | t               |
|----------------|----------------|----------------|-----------------|
| $7.2 \pm 0.10$ | $7.5 \pm 0.10$ | $3.6 \pm 0.15$ | $0.35 \pm 0.05$ |

### Reel Dimensions

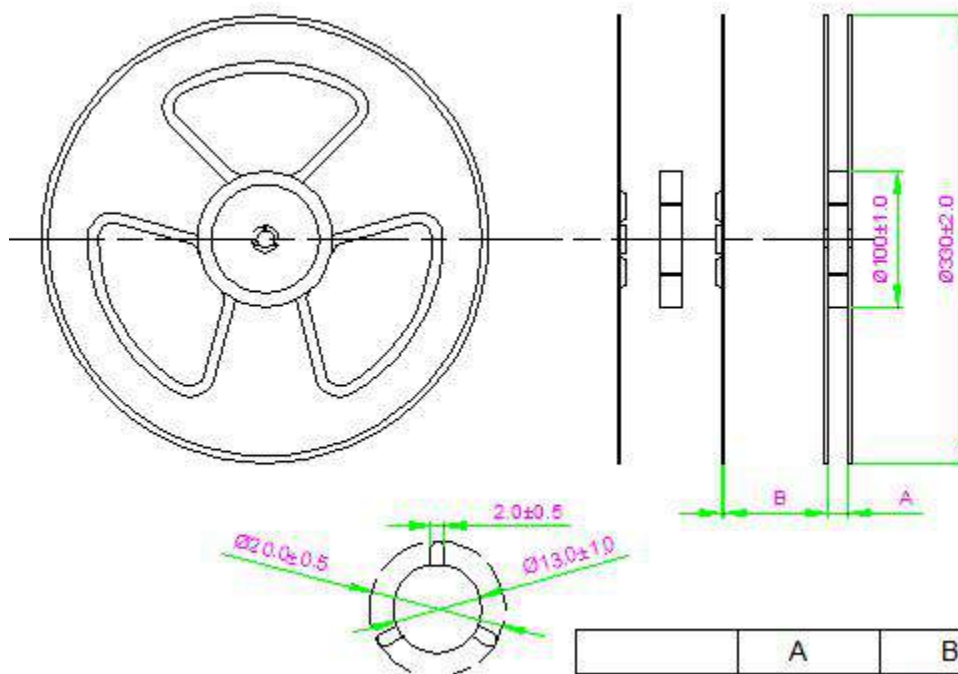


|    | A              | B             |
|----|----------------|---------------|
| mm | $16.5 \pm 0.2$ | $2.0 \pm 0.2$ |

- Peel force of top cover tape

The peel speed shall be about 300mm/minute

The peel force of top cover tape shall be between 0.1 to 1.3 N

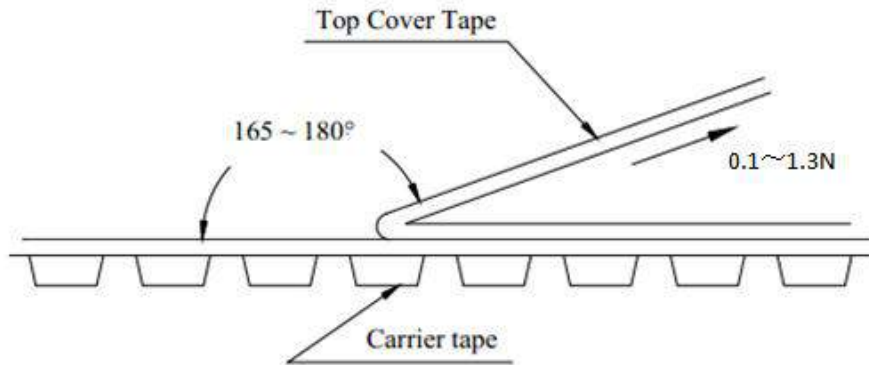

- Numbers of taping  
1500pieces/reel

- Label making

The following items shall be marked on the production and shipping

Label on the reel

- Production Label
- Part No
- Description
- Quantity
- Produce No
- Taping No

- Shipping Label

- (1)\*Customer's name
- (2)\*Customer's part No
- (3)Manufacturer's part No
- (4)Manufacturer's name
- (5) Manufacturer's country