



TBC-C04 多量程闭环型霍尔电流传感器的初、次级之间是绝缘的，可用于测量直流、交流和脉冲电流。

TBC-C04 multi-range current sensor is a close loop device based on the measuring principle of the hall effect and null balance method, with a galvanic isolation between primary and secondary circuit. It provides accurate electronic measurement of DC, AC or pulsed currents.


电参数 Electrical data($T_a=25^{\circ}\text{C} \pm 5^{\circ}\text{C}$)

参数 Parameter	型号 Type	TBC25C04	TBC50C04	单位 Unit
额定输入电流 (I_{pn}) Rated input (I_{pn})		25	50	A
测量电流范围 (I_p) Measure range (I_p)		0~±55	0~±100	A
测量电阻范围 Measure resister range		54~360 (±15V)	68~180 (±15V)	Ω
额定输出电流 (I_{sn}) Rated output (I_{sn})		±25±0.5%@($I_p=\pm I_{pn}$)	±50±0.5%($I_p=\pm I_{pn}$)	mA
电源电压 Supply voltage		±15±5%		
功耗电流 Power consumption		20+ $I_pX(N_p/N_s)$		
匝比 (N_p/N_s) Turns ratio (N_p/N_s)		1-2-3-4:1000		
零点失调电流 Zero offset current	@ $I_p=0$	≤±0.15		
失调电流温漂 Offset current drift	@ -40°C~+85°C	≤0.5		
响应时间 Response time	@50A/μ S, 10%-90%	<1		
线性度 Linearity	@ $I_p=0\pm I_{pn}$	≤0.1		
绝缘电压 Galvanic isolation	@ 50Hz/60Hz, AC, 1min	5		
di/dt 跟随精度 di/dt accurately followed		>50		
带宽 (-3dB) Bandwidth (-3dB)		DC...200		
次级线圈电阻 @70°C Secondary coil resister	40	30		
		Ω		

应用 Applications

- 变频调速系统
Variable speed drives
- 电焊机
Welding machine
- 通讯电源
Battery supplied applications
- 不间断电源 UPS
Uninterruptible Power Supplies (UPS)
- 电化学
Electrochemical

结构参数 Mechanical dimension (for reference only)

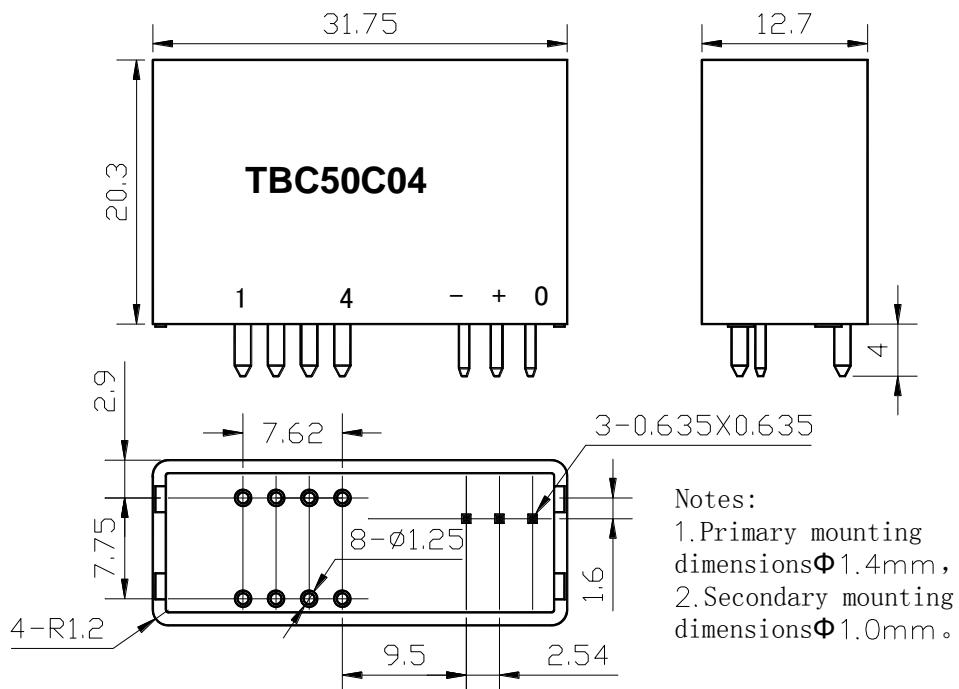

Remarks:

1. All dimensions are in mm.
2. General tolerance $\pm 1\text{mm}$.

接线图 Pin connections

初级匝数 Primary turns	额定电流 Rated current IPN (A)	初级阻抗 Primary resister [mΩ]	额定输出 Rated output IS (mA)	初级连接 Pins connections
1	25, 50	0.05	25, 50	8 O—O—O—O 5 OUT IN1 O—O—O—O 4
2	12, 25	0.20	24, 50	8 O—O—O—O 5 OUT IN1 O—O—O—O 4
3	8, 16	0.48	24, 48	8 O—O—O—O 5 OUT IN1 O—O—O—O 4
4	6, 12	1.00	24, 48	8 O—O—O—O 5 OUT IN1 O—O—O—O 4

使用说明 Directions for use

1. 当待测电流从传感器输入脚流过，即可在输出端测得电流大小。(注意：错误的接线可能导致传感器损坏)
 When the current will be measured goes through a sensor, the current will be measured at the output end.
 (Note: The false wiring may result in the damage of the sensor)
2. 可按用户需求定制不同额定输入电流和输出电流的传感器。
 Custom design in the different rated input current and the output current are available.

执行标准 Standards


- UL94-V0.
- EN60947-1:2004
- IEC60950-1:2001
- EN50178:1998
- SJ 20790-2000

总体参数 General date

	数值 Value	单位 Unit	符号 Symbol
工作温度 Operating temperature	-40 to +85	°C	TA
储存温度 Storage temperature	-40 to +125	°C	TS
毛重(约) Mass (approx)	15	g	M

特性图 Characteristics chart

脉冲电流信号响应特性

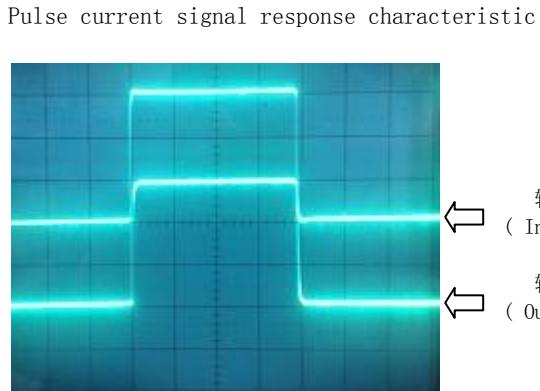

抗脉冲电压干扰特性

Effects of impulse noise

