

# 规格书

## Specification

品名  
Model name

HMB1206-12  
ROHS  
C129210

PROPRIETARY  
Huaneng Electronic co.,Ltd.

CONFIDENTIAL  
Huaneng Electronic co.,Ltd.

Version #	Spec V1.0
制作日期 Date	2017/09/20
准备 Prepared	Yang shu yin Acoustic specialist,R&D Dept.
审核 Approved	Zhang chang hua Executive Manager,R&D Dept.



江苏华能电子有限公司

Components Operating Div.  
Huaneng Electronic co.,Ltd.

1.适用范围：本规范适用于HMB1206-03 ROHS 蜂鸣器。

This specifications apply the HMB1206-03 ROHS buzzer.

2.基本规格/General specification

项目/Item		规格/Spec	条件/Condition
1	额定电压 Rated voltage	12VDC	
2	工作电压 Operation voltage	8~16VDC	
3	声压 Sound Pressure Level=SPL	Min 85dB	测试环境: 标准状态, 标准驱动电路, 额定电压 测试距离: 0.1m Standard State, Standard Drive Circuit. Rated voltage, Distance at 0.1m
4	平均消费电流 Average consumption current	Max 30mA	
5	振荡频率 Oscillation frequency	2300±300Hz	
6	响应时间 Response time	Max 50ms	最低工作电压 Lowest operation voltage
7	工作温度范围 Range of operation temperature	-20~+70°C	声压 ≥80dB
8	保存温度范围 Range of preservation temperature	-30~+85°C	
9	端子强度 Terminal strength	10N	拉负荷方向的终端轴 Pull load on the direction of the terminal axis
10	外部尺寸 Externals size	Φ12x6.5	参阅附图 Refer to the attached drawing
11	重量 Mass	2g	

☆标准状态: 常温(15~35°C), 湿度(25~85%相对湿度), 空气压力(860~1060hpa)

在假设的情况判断, 测试是一基本状态下进行。

Standard State: Ordinary Temp(15~35°C), Humidity(25~85%RH), Air pressure(860~1060hPa)



In case of doubtful judgment, the test is re—performed under Basic State.



☆基本情况: 温度。(20±2°C), 湿度(60~70%相对湿度), 空气压力(860~1060hpa)

Basic State: Temp.(20±2°C), Humidity(60~70%RH), Air pressure(860~1060hPa)



<标准驱动电路>/<Standard Drive Circuit>

<标准测试治具>/<Standard Test Fixture>

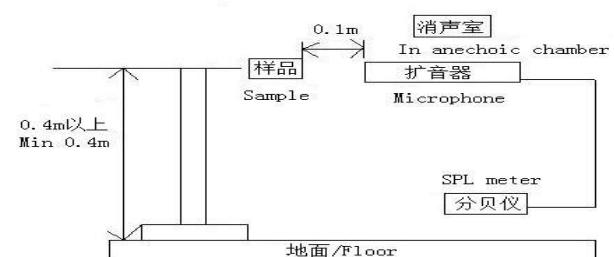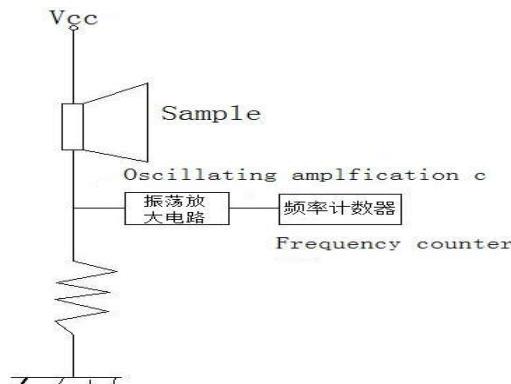

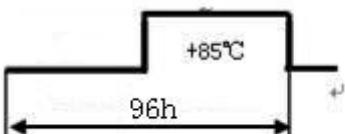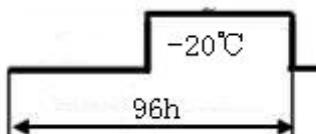项目/Item	试验条件/Test condition	判断标准/Criteria	引用规格
1 高温保存试验 High temperature Preservation	+85°C 环境下放置24小时 Exposure to +85°C for 24 hrs.	经过测试，符合规格，没有任何不合格的外观和性能 After the test the part shall meet specifications without any degra.	
2 低温保存试验 Low temperature preservation	-20°C 环境下放置24小时 Exposure to -20°C for 24 hrs.		
3 高温试验 High temperature Shock			
4 低温试验 Low temperature Shock			
5 常温寿命试验 Ordinary Temp. Life	常温 (25°C ±10°C) 电压12VDC连续测试48小时 Driving the sounder at 12VDC for 48hrs in the room temperature (25°C ±10°C)		
6 高温寿命试验 High Temp. Life	高温(+85°C) 电压12VDC连续测试2小时 Driving the sounder at 12VDC for 2hrs in the low temperature (+85°C)		
7 低温寿命试验 Low Temp. Life	低温(-20°C) 电压12VDC连续测试2小时 Driving the sounder at 12VDC for 2hrs in the low temperature (-20°C)		
8 端子拉力试验 Lead strength	10N的拉力在端子上拉10±1秒 Pull load on the direction of the terminal axis for 10±1 sec.		
9 跌落试验 Free drop	70cm高自由掉落到厚40mm的木板上，每个方向一次 Free drop, 70cm height, on wood board (t40mm) X, Y, Z 3Direction 1time each, total 3times.	排除弯曲的针 Exclude bending of Pin	
10 端子可焊性试验 Solderability	260±5°C 焊接温度。时间: 5±0.5sec. Temp. 260±5°C Soaking Time: 5±0.5sec	端子95%必须覆盖着焊料 95% surface of lead pins must be covered with fresh solder and no soldering holes Should be found	

1	2	3	4	5	6
				一般公差 $\pm 0.3$	

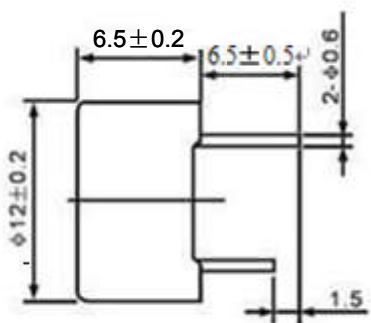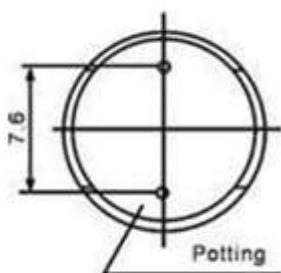

			审批 APPROVED	张长华	材料 MATERIAL	PPO料	制造日期 DATE		出图日期
			检查 CHECKED	杨树银	加工 TREATMENT			APPEARANCE DRWG	
			设计 DESIGNED		表面处理 SURF. FIN.				
			制图 DRAWN		第三角法 ③	尺度 SCALE 2/1 MM		产品名称 HMB1206-12 ROHS	
日期 DATE	变更号码 CHANGE NO.	变更内容 CHANGE CONTENTS		江苏华能电子有限公司 HUANENG Electronic co.,Ltd			品号 CODE NO.		

## 产品特征图

